

Via E. Fermi - ZI Ramera
31010 - Mareno di Piave (TV) - ITALIA
Tel. 0438492502
Fax 0438492545
www.gridiron.it - info@gridiron.it

TECHNICAL SHEET

CE

ASSEMBLED CODE	4R01PZGS
DESCRIPTION	Reinforced concrete Sump unit for channel MOD. R150, c/w lateral outlet with sleeve with seal and cap Ø 125 mm, n.1 knock-out section for additional drainage point Ø 125 mm and a lateral connector sleeve for "T" intersection, c/w n.1 x GJS500-7 ductile iron grating dim. 150x500 H25 mm, installed and locked, painted. Load class D400 according to EN 1433:2008 Norm, if installed following manufacturer instructions.
PRODUCT LINE	reinforced concrete sump unit
STANDARD	EN 1433:2008
LOADING CLASS	D400 - EN 1433:2008
INTENDED USE OR USES OF THE PRODUCT	Collection and channelling of surface water into areas subject to pedestrian and/or vehicle traffic according to the indicated flow rate.
DURABILITY	Classification of resistance to atmospheric agents: W +R (§6.3.3.3 EN 1433:2008)
QUANTITY PER PACK	12
1) CHANNEL	4R01PZ
MATERIAL	Cast Concrete
SERIES TYPE	Serie R 150
SECTION TYPE	Standard
PROFILE TYPE	Galvanized edge
VERSION TYPE	Normal without built-in slope
2) GRID	4R01GS1
GRID TYPE	Ductile-iron Grid
MATERIAL	Ductile-Iron GJS500-7 : EN1563
SURFACE FINISH	Powder coated
SLOT SIZE	15 mm x 85 mm

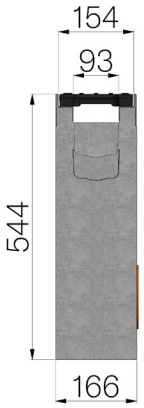

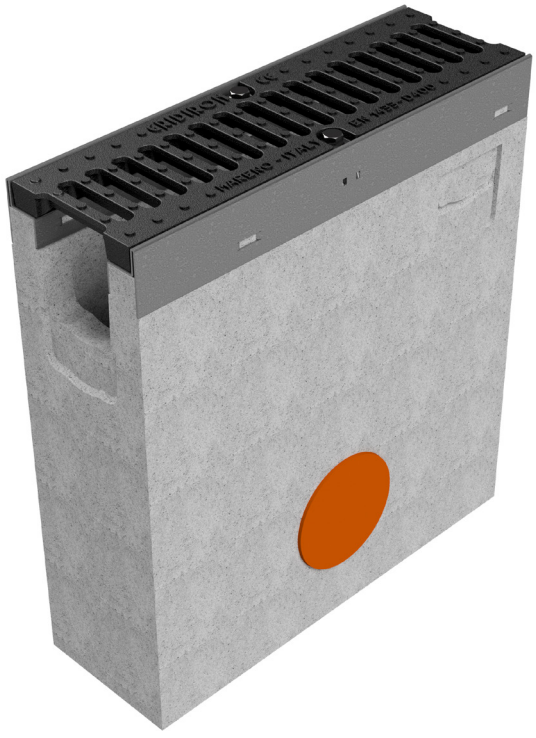

Article dimensions mm	Inner width mm	Runoff section cm2	Weight Kg/each
500 x 166 x H 544 mm	93	90	68,48