

GRIDIRON
BUILD YOUR CHANGES
GRIDIRON GROUP

Via E. Fermi - ZI Ramera
31010 - Mareno di Piave (TV) - ITALIA
Tel. 0438492502
Fax 0438492545
www.gridiron.it - info@gridiron.it

TECHNICAL SHEET

ASSEMBLED CODE	4R02PZGS
DESCRIPTION	Reinforced concrete Sump unit for channel MOD. R210, c/w sleeve with seal and cap for lateral outlet Ø 160 mm, n.1 knock-out section for additional drainage point Ø 125 mm and a lateral connector sleeve for "T" intersection, c/w n. 1 x GJS500-7 ductile iron grating dim. 210x500 H25 mm, installed and locked, painted. Load class D400 according to EN 1433:2008 Norm, if installed following manufacturer instructions.
PRODUCT LINE	reinforced concrete sump unit
LOADING CLASS	D400 - EN 1433:2008
QUANTITY PER PACK	8
1) CHANNEL	4R02PZ
MATERIAL	Cast Concrete
SERIES TYPE	Serie R 210
SECTION TYPE	Standard
PROFILE TYPE	Galvanized edge
VERSION TYPE	Normal without built-in slope
2) GRID	4R02GS1
GRID TYPE	Ductile-iron Grid
MATERIAL	Ductile-Iron GJS500-7 : EN1563
SURFACE FINISH	Powder coated
SLOT SIZE	15 mm x 130 mm

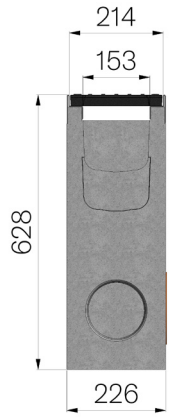

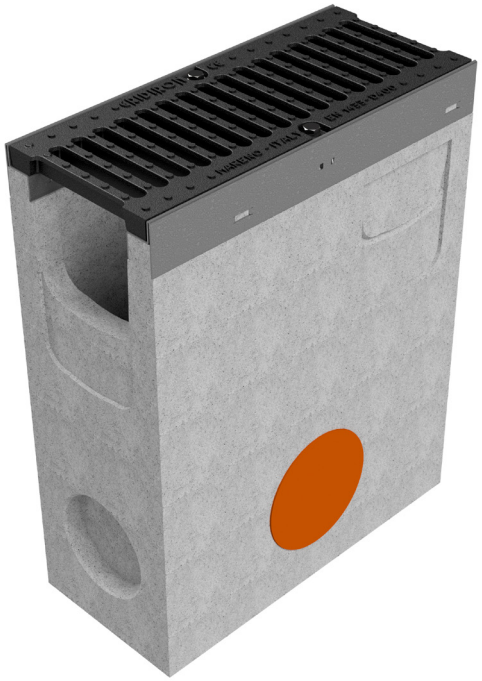

Article dimensions mm	Inner width mm	Runoff section sq-cm	Weight Kg/each
500 x 226 x H 628 mm	153	160	85,06